

Categoria:


# MALE HEADER

Prodotto:

## STRIP HEADERS

Male header straight

Pitch 2.54 mm

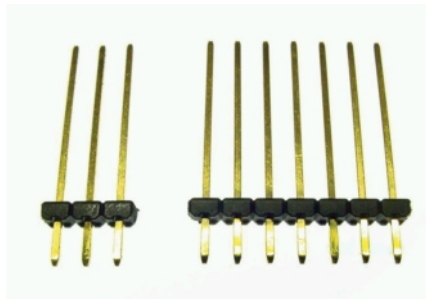

### FEATURES:

Breakable header, insulator profile  
1.7mm  
Pin side dimension 0.6mm

### MATERIAL:

Housing: High temperature thermoplastic UL94 V0  
Contact: Phosphor bronze.

### ELECTRICAL:

Current rating: 4A maxi.  
Dielectric withstanding: 1000 V  
Insulation resistance: 10000 M $\Omega$  mini

### MECHANICAL:

Temperature rating: -55°C to +125°C  
Pc board Hole diameter  $\varnothing$  1 mm.

### PACKAGING:

Recyclable cardboard boxes.

### PRODUCT CODE

A	B	C	D	E
38x	0xxx	1	xx	4x0


Version	A	B	C
0543	9.2	4.3	3.2
0298	10.2	5.4	3.1
0358	11.2	6.3	3.2
0334	12.4	7.5	3.2
0369	13.8	8.6	3.5
0395	15.1	8.9	4.5
0575	17.7	12.8	3.2
0211	22	16.5	3.8

### CODE LEGEND

- A 5 Gold version  
6 Tin version
- B Version see table
- D Number of contacts per strip from 01 to 40.
- E 00/40  
Plating  
0 Gold 0.2  $\mu$  m over Ni 1.27  $\mu$  m  
4 Tin 4  $\mu$  m over Ni 1.27  $\mu$  m  
Other platings on demand.

KONTEK  
COMATEL

(N= Number of contacts)

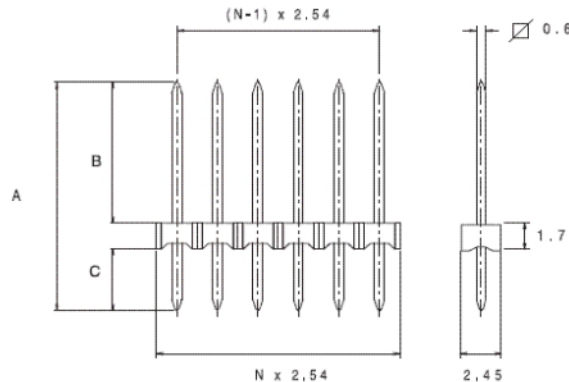

### NOTE