



HIGH THERMAL CONDUCTIVITY COMPLIANT GAP FILLER

Tflex™ 700 is a 5 W/mK soft gap filler thermal interface material with great thermal performance and high compliancy. The soft interface pad conforms to component topography, resulting in little or no stress on the components and mating chassis or parts.

Unique silicone and ceramic filler technology allows a combination of high compliancy and high thermal performance. Tflex™ 700 is electrically insulating, it is stable from -45°C thru 200°C and meets UL 94V0 flame rating. Naturally tacky, it requires no additional adhesive coating to inhibit thermal performance.

FEATURES AND BENEFITS

- Thermal conductivity 5.0 W/mK
- Highly compliant
- Lowest thermal resistance even at low pressure
- Available in thicknesses from 0.020" thru 0.200" (0.5mm thru 5.0mm)
- Naturally tacky for adhesion during assembly and transport

APPLICATIONS

- Cooling components to chassis, frame or other mating components
- Mass storage devices
- Heat pipe thermal solutions for notebook computers
- Automotive engine control
- Telecommunication hardware
- LED solid state lighting
- Power electronics
- Flat panel displays
- Audio and video components
- Computer servers and other IT infrastructure
- GPS navigation and other portable devices



global solutions: local support.™

Americas: +1.888.246.9050
Europe: +49.(0).8031.2460.0
Asia: +86.755.2714.1166

CLV-customerservice@lairdtech.com
www.lairdtech.com/thermal

TFLEX™ 700 TYPICAL PROPERTIES

	TFLEX 700™	TEST METHOD
Construction	Filled silicone sheet	NA
Color	Dark Grey	Visual
Thermal Conductivity	5.0 W/mK	Hot Disk™
Hardness (Shore 00)	50	ASTM D2240
Specific Gravity	1.73	Helium Pycnometer
Thickness Range	0.020" - .200" (0.5 - 5.0mm)	
Thickness Tolerance	±10%	
UL Flammability Rating	94 V0	File E180840
Temperature Range	-45°C to 200°C	See reliability report
Volume Resistance	1 X 10 ¹³ ohm-cm	ASTM D257
Outgassing TML	1.0%	ASTM E595
Outgassing CVC	0.13%	ASTM E595

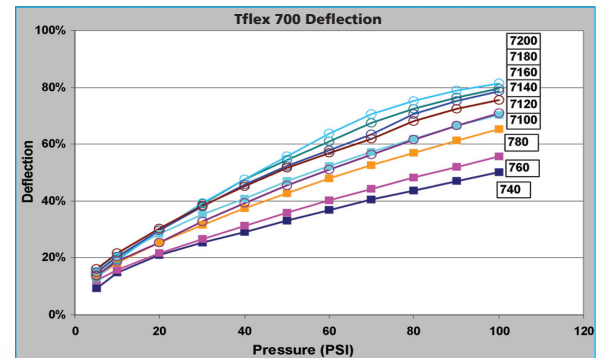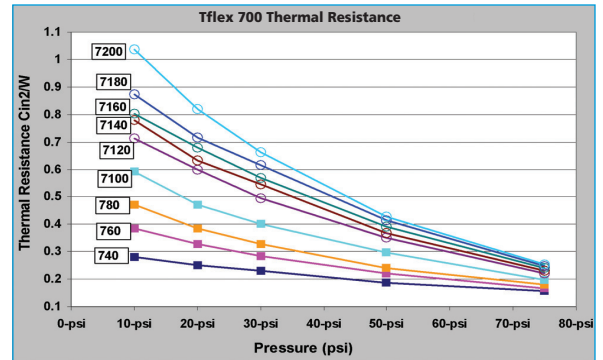

STANDARD THICKNESSES

Standard thickness 0.020" (0.5mm) through 0.200" (5.0mm) available in 0.010" (0.25mm) increments.

MATERIAL NAME AND THICKNESS

Tflex™ - indicates elastomeric gap filler product line

7XXX - indicates Tflex™ 700 product line and thickness in mils (0.001-inches)

-DC1 - one side tacky; default is both sides tacky

Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.