

Wireless Bipolar Power Transistor 30W, 16 -1.7 GHz

M/A-COM Products
Released - Rev. 07.07


Features

- Designed for linear amplifier applications
- -30 dBc typ. 3rd IMD at 30 W PEP
- Common emitter Class AB operation
- Internal input impedance matching
- Diffused emitter ballasting

ABSOLUTE MAXIMUM RATING AT 25°C

Parameter	Symbol	Rating	Units
Collector-Base Voltage	V_{CBO}	60	V
Collector-Emitter Voltage	V_{CES}	60	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current	I_C	10	A
Power Dissipation	P_D	109	W
Junction Temperature	T_J	200	°C
Storage Temperature	T_{STG}	-55 to + 150	°C
Thermal Resistance	θ_{JC}	1.6	°C/W

Outline Drawing

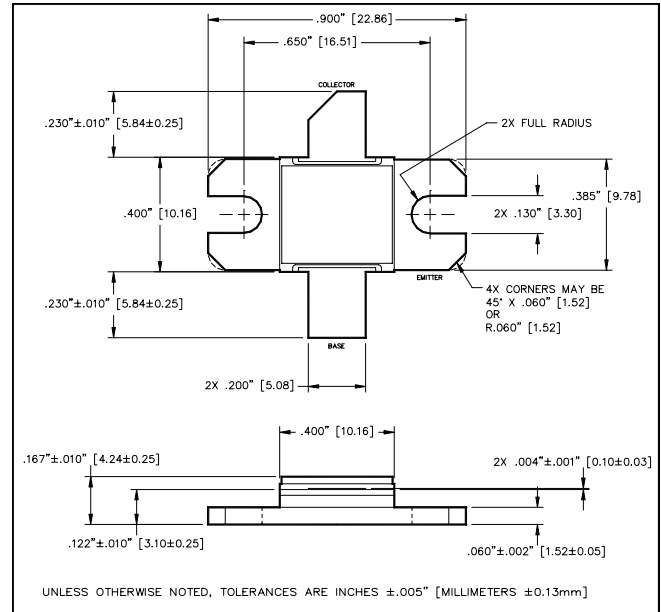


ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Symbol	Min	Max	Units	Test Conditions
Collector-Emitter Breakdown Voltage	BV_{CES}	60	-	V	$I_C = 40$ mA
Collector-Emitter Leakage Current	I_{CES}	-	4.0	mA	$V_{CE} = 25$ V
Collector-Base Breakdown Voltage	BV_{CEO}	20	-	V	$I_C = 40$ mA
Collector-Base Breakdown Voltage	BV_{CER}	30	-	V	$I_C = 40$ mA, $R_{BE} = 220$ Ω
Emitter-Base Breakdown Voltage	BV_{EBO}	3.0	-	V	$I_B = 40$ mA
DC Forward Current Gain	h_{FE}	15	120	-	$V_{CE} = 5$ V, $I_C = 2$ A
Power Gain	G_P	10	-	dB	$V_{CC} = 25$ V, $I_{CQ} = 200$ mA, $P_{out} = 30$ W PEP, $F = 1.6, 1.65, 1.70$ GHz
Collector Efficiency	η_C	40	-	%	$V_{CC} = 25$ V, $I_{CQ} = 200$ mA, $P_{out} = 30$ W PEP, $F = 1.6, 1.65, 1.70$ GHz
Input Return Loss	RL	10	-	dB	$V_{CC} = 25$ V, $I_{CQ} = 200$ mA, $P_{out} = 30$ W PEP, $F = 1.6, 1.65, 1.70$ GHz
Load Mismatch Tolerance	VSWR-T	-	3.0:1	-	$V_{CC} = 25$ V, $I_{CQ} = 200$ mA, $P_{out} = 30$ W PEP, $F = 1.6, 1.65, 1.70$ GHz
3rd Order IMD	IMD ₃	-	-28	dBc	$V_{CC} = 25$ V, $I_{CQ} = 020$ mA, $P_{out} = 30$ W PEP $F = 1650$ MHz, $\Delta F = 100$ kHz

TYPICAL OPTIMUM DEVICE IMPEDANCES


F (GHz)	Z_{IN} (Ω)	Z_{LOAD} (Ω)
1.60	2.1+j4.9	1.3-j0.7
1.65	3.1+j3.8	1.2-j0.8
1.70	2.1+j3.5	1.2-j0.9

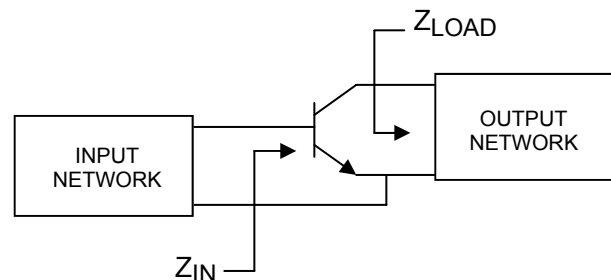


Wireless Bipolar Power Transistor 30W, 16 -1.7 GHz

M/A-COM Products
Released - Rev. 07.07

TEST FIXTURE DIMENSIONS

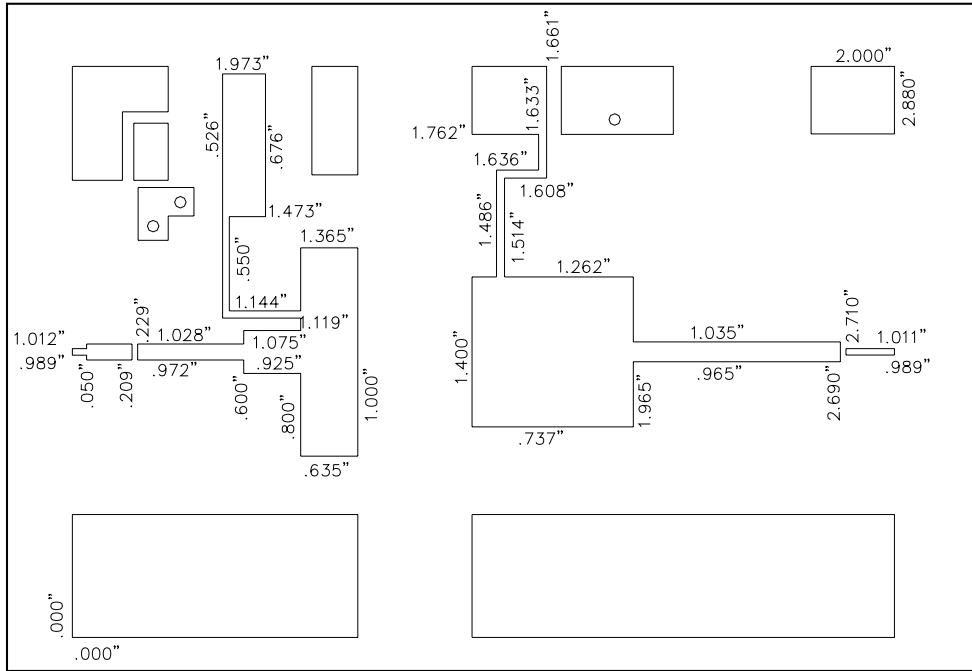

TEST FIXTURE ASSEMBLY

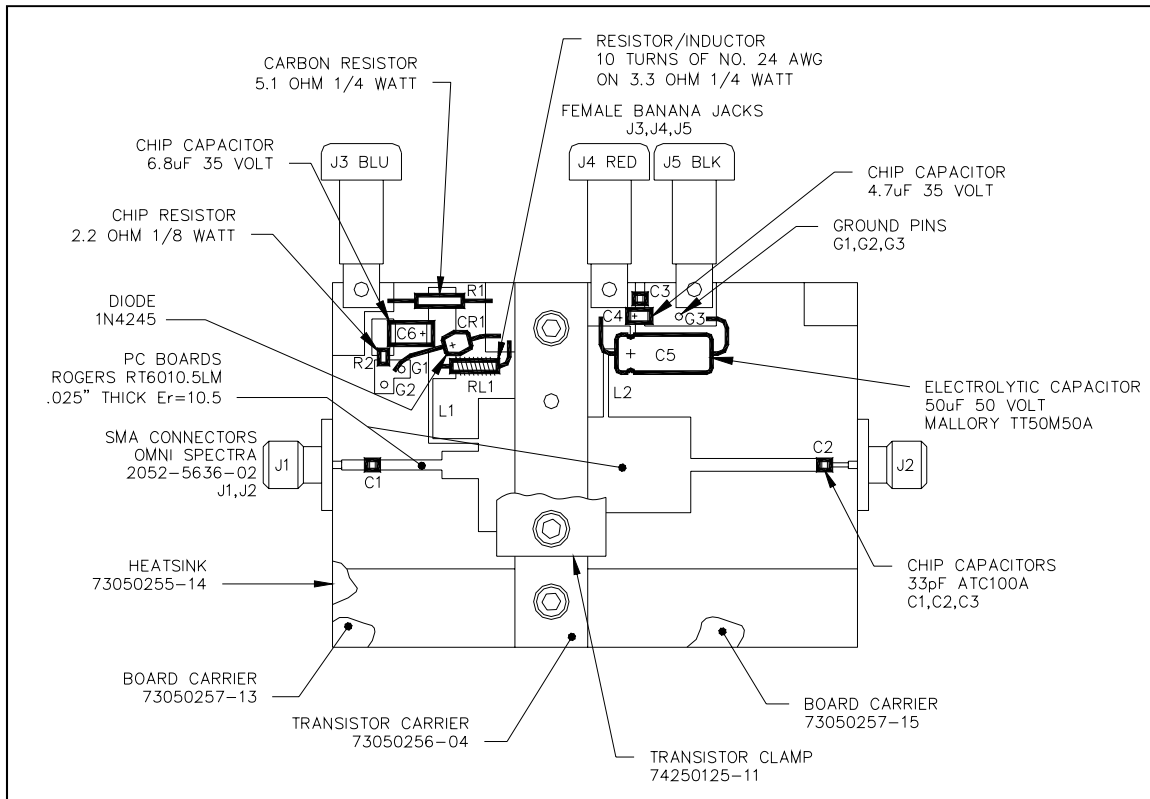

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 - **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 - **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
- Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Typical Broadband Performance Curves

