

FINGER GUARDS

General


These grids of appealing design are provided to protect the fan aperture. They are also serving as finger protection and thus satisfy the safety class IP 20 according to DIN 40050, and respective UL standards.

Air delivery will be slightly reduced with the use of flat finger guards.

No reduction in air flow by using circular finger guards.

Flat finger guards

Made of aluminium of 2 mm thickness, in black finish.

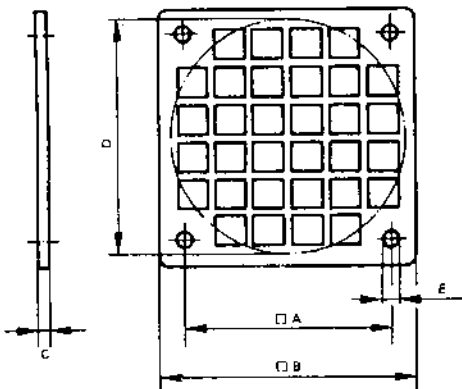


Article No.	Dimension A	Dimension B	Dimension C	ØD	ØE
V360X3C030	32 ± 0.2	38 ± 0.3	2 ± 0.1	33	3.5
V480X4C010	42 ± 0.2	50 ± 0.3	2 ± 0.1	45	3.5
V600X3D010	50 ± 0.2	62 ± 0.3	2 ± 0.1	57	3.5

D = inside diameter of fan

Circular finger guards

Made of steel wire 1.5mm in diameter, chromium-plated.

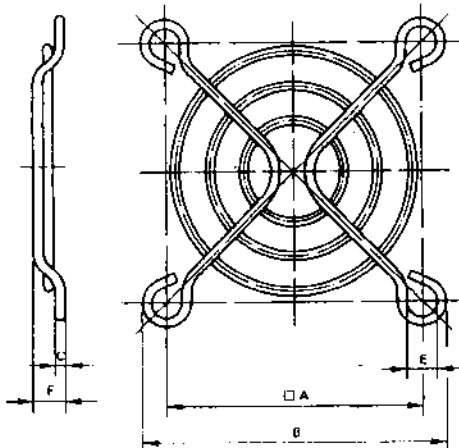

Article No.	Dimension A	Dimension B	Dimension C	ØE	Dimension F
V360X4A029	32	39	1.5	4	5
V480X4A009	42	49	1.5	4	5
V600X4A009	50	57	1.5	4.5	5
V72AX3A068	71.5	78.5	1.5	4.5	5